

# Alimentatore multicorrente tensione/DALI

## 0-20W - IP20 - 03151




### INFORMAZIONI TECNICHE:

**Input:** 99/264Vac  
**I Out DC:** 250mA...700mA  
**Frequenza:** 50/60Hz  
**Garanzia:** 2 anni

#### Disegno

misure in mm

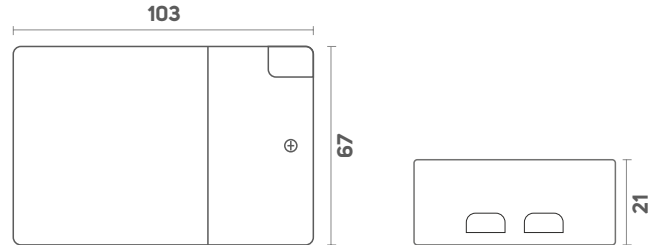

#### Uscita in corrente costante

Pout [W] max	Vout [DC]	Iout [DC]	U out [V]
12	10...48	250mA cost.	59
14	10...48	300mA cost.	
17	5...48	350mA cost.	
19	5...48	400mA cost.	
22	5...48	450mA cost.	
24	5...48	500mA cost.	
26	3...48	550mA cost.	
28	3...48	600mA cost.	
31	3...48	650mA cost.	
32	3...46	700mA cost.	

#### Uscita in tensione costante (Ta °C= -25...+50 / Tc °C= 75)

10	12 cost.	900mA cost.
20	24 cost.	830mA cost.

#### Accessori

Cavo sincro

Cod.: **10080** L=1,5m

Cod.: **10081** L=4m



### Schemi di collegamento

