

Alimentatore multicorrente tensione/DALI

0-20W - IP20 - 03152




INFORMAZIONI TECNICHE:

Input: 99/264Vac
I Out DC: 250mA...700mA
Frequenza: 50/60Hz
Garanzia: 2 anni

Disegno

misure in mm

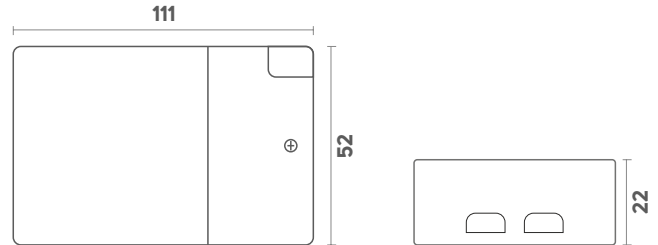

Uscita in corrente costante

Pout [W] max	Vout [DC]	Iout [DC]	U out [V]
12	15...49	250mA cost.	55
17	10...49	350mA cost.	
19	5...49	400mA cost.	
20	5...45	450mA cost.	
20	5...40	500mA cost.	
20	3...36	550mA cost.	
20	3...33	600mA cost.	
20	3...28	700mA cost.	

Uscita in tensione costante (Ta °C= -25...+45 / Tc °C= 75)

16	24	700mA max.	
----	----	------------	--

Accessori

Cavo sincro

Cod.: **10080** L=1,5m

Cod.: **10081** L=4m



Schemi di collegamento

