


# PANNELLI Backlight

## Backlight 1195x595x30mm



### INFORMAZIONI PRODOTTO:

PRODUCT INFORMATIONS:

Unità: mm  
Unit: mm

Codice d'acquisto: **15249-IO**

Purchase code:

P/N: **PN00790**

Grado IP:

IP grade: **IP40**

Alimentazione:

Voltage supply: **220-240Vac 50-60 Hz**

Potenza:

Power: **60W**

Alimentatore:

Driver: **Driver SELV (incluso, esterno al corpo lampada / included, outside body lamp)**

Dimmerabile:

Dimmable: **No**

Sorgente luminosa:

Light source: **LED SMD**

CCT/ Colore:

CCT/ Colour: **3000K**

Flusso:

Flux: **5000lm**

Fascio:

Beam: **120°**

CRI:

>**90**

Tolleranza cromatica:

Chromatic tolerance: **3SDCM**

Fattore di abbagliamento:

Glare rating: **UGR<19**

Gruppo di rischio fotobiologico:

Photobiological hazard group: **Rg0**

Vita utile:

Lifetime: **L70B50@60000**

Fissaggio:

Fixing: **Ad incasso / Recessed**

Temperatura operativa:

Operating temperature: **-10°C (min) - +30°C (max)**

Classe energetica:



Prodotto contenente una sorgente luminosa di classe <E> (non sostituibile)  
Product contained a light source of energy class <E> (not replaceable)

Norme:

Standards: **EC 60598-2-2:2023 used in conjunction with IEC 60598-1:2020**  
(Specifies general requirements for luminaires, recessed luminaires and recessed air-handling luminaires)

**IEC TR 62778:2014**

(Application of IEC 62471 for the assessment of blue light hazard to light source and luminaires)

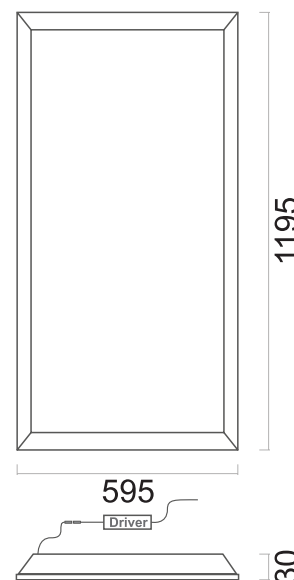

### ACCESSORI:

ACCESSORIES:

**18044**

Case a plafone 68mm  
Ceiling case 68mm

**18005**

Cornice incasso  
Recessed frame

**07550**

Inverter+batteria per emergenza  
Ceiling case 68mm