


# STRIP LED FLEX

140LEDs/m - 14,5W/m - 24Vdc



## INFORMAZIONI PRODOTTO:

PRODUCT INFORMATIONS:

Codice d'acquisto: **06710**

Purchase code:

P/N: **SL00220\_00001**

Grado IP:

IP grade:

**IP20**

Alimentazione:

Voltage supply:

**24Vdc**

Potenza:

Power:

**14,5W/m**

Rialimentazione:

Max run:

**Fino a - Up to 5m**

Alimentatore:

Driver:

**Driver SELV 24Vdc (non incluso / not included)**

Dimmerabile:

Dimmable:

**Si (dimmer non incluso) - Yes (dimmer not included)**

Sorgente luminosa:

Light source:

**LED SMD 2835**

CCT/ Colore:

CCT/ Colour:

**5800K**

Flusso:

Flux:

**2302lm/m**

Fascio:

Beam:

**120°**

CRI:

**>85**

Tolleranza cromatica:

Chromatic tolerance:

**3 SDCM**

Vita utile:

Lifetime:

**L70B50@60000h**

Fissaggio:

Fixing:

**3M 300LSE**

Temperatura operativa:

Operating temperature:

**-10°C (min) - +30°C (max)**

Norme:

Standards:

**EN62031:2018**

(LED modules for general lighting - Safety specification)

**IEC TR 62778:2014**

(Application of IEC 62471 for the assessment of blue light hazard to light source and luminaires)

**EN61547:2009**

(EMC immunity requirements)

**EN55015:2019+A11:2020**

(Limits and methods of measurement of radio disturbance characteristics of electrical lighting)

Garanzia:

Warranty:

**5 anni / 5 years**


Classe energetica:

Energetic class:



Unità: mm

Unit: mm

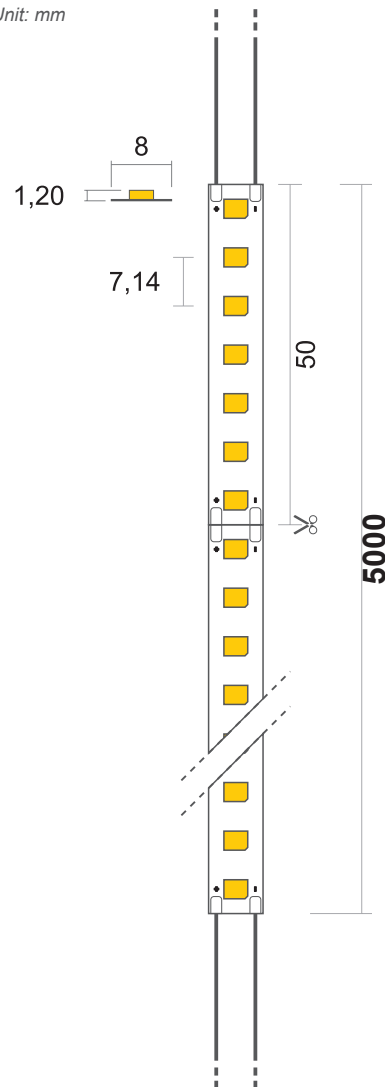

Uscita cavo / Cable output: IN/OUT  
Lunghezza cavi / Cables length: 100mm

Tolleranza di potenza ± 5% - Tolleranza al flusso luminoso ± 5% - Incertezza di misura ± 10% - Ta: 25°C Power tolerance ± 5% - Luminous flux tolerance ± 5% - Measurement uncertainty ± 10% - Ta: 25°C