

STRIP LED FLEX

60LEDs/m - 14,4W/m - 24Vdc



INFORMAZIONI PRODOTTO:

PRODUCT INFORMATIONS:

Unità: mm
Unit: mm

Codice d'acquisto: **05716**

Purchase code:

P/N: **SL00318**

Grado IP:

IP grade:

IP20

Alimentazione:

Voltage supply:

24Vdc

Potenza:

Power:

14,4W/m

Rialimentazione:

Max run:

Fino a - Up to 5m

Alimentatore:

Driver:

Driver SELV 24Vdc (non incluso / not included)

Dimmerabile:

Dimmable:

Si (dimmer non incluso) - Yes (dimmer not included)

Sorgente luminosa:

Light source:

LED SMD 5050

CCT/ Colore:

CCT/ Colour:

RGB + 2700K

Flusso:

Flux:

631lm/m

Fascio:

Beam:

120°

CRI:

N.D.

Tolleranza cromatica:

Chromatic tolerance:

N.D.

Vita utile:

Lifetime:

L70B50@60000h

Fissaggio:

Fixing:

3M 300LSE

Temperatura operativa:

Operating temperature:

-10°C (min) - +30°C (max)

Norme:

Standards:

EN62031:2018

(LED modules for general lighting - Safety specification)

IEC TR 62778:2014

(Application of IEC 62471 for the assessment of blue light hazard to light source and luminaires)

EN61547:2009

(EMC immunity requirements)

EN55015:2019+A11:2020

(Limits and methods of measurement of radio disturbance characteristics of electrical lighting)

Garanzia:


Warranty:

5 anni / 5 years

Classe energetica:

Energetic class:

N.D.

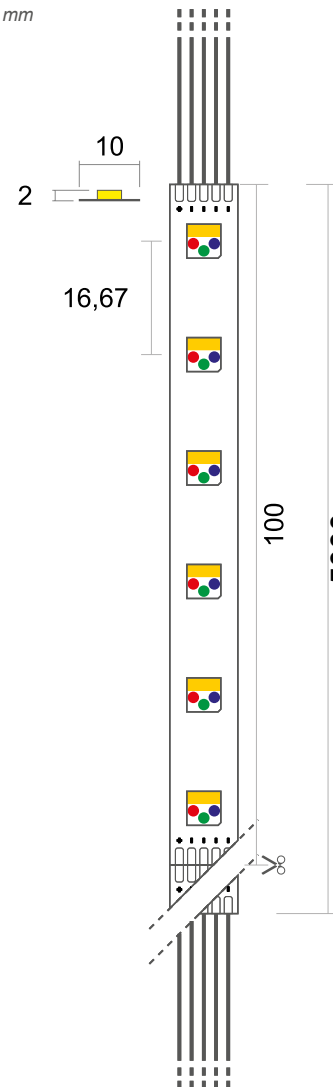

Uscita cavo / Cable output: IN/OUT
Lunghezza cavi / Cables length: 100mm

Tolleranza di potenza ± 5% - Tolleranza al flusso luminoso ± 5% - Incertezza di misura ± 10% - Ta: 25°C Power tolerance ± 5% - Luminous flux tolerance ± 5% - Measurement uncertainty ± 10% - Ta: 25°C