

# STRIP LED FLEX

140LEDs/m - 28,8W/m - 24Vdc



## INFORMAZIONI PRODOTTO:

PRODUCT INFORMATIONS:

Codice d'acquisto: **06589**

Purchase code: **SL00330**

Grado IP: **IP20**

Alimentazione: **24Vdc**

Potenza: **28,8W/m**

Rialimentazione: **Fino a - Up to 5m**

Alimentatore: **Driver SELV 24Vdc (non incluso / not included)**

Dimmerabile: **Si (dimmer non incluso) - Yes (dimmer not included)**

Sorgente luminosa: **LED SMD 5050**

CCT/ Colore: **RGB + 3000K**

Flusso: **○1663lm/m ●132lm/m ●319lm/m ●89lm/m**

Fascio: **120°**

CRI: **N.D.**

Tolleranza cromatica: **N.D.**

Vita utile: **L70B50@60000h**

Fissaggio: **3M 300LSE**

Temperatura operativa: **-10°C (min) - +30°C (max)**

Norme: **EN62031:2018**  
(LED modules for general lighting - Safety specification)

**IEC TR 62778:2014**  
(Application of IEC 62471 for the assessment of blue light hazard to light source and luminaires)


**EN61547:2009**  
(EMC immunity requirements)

**EN55015:2019+A11:2020**  
(Limits and methods of measurement of radio disturbance characteristics of electrical lighting)

Garanzia: **5 anni / 5 years**

Classe energetica: **N.D.**

Unità: mm  
Unit: mm

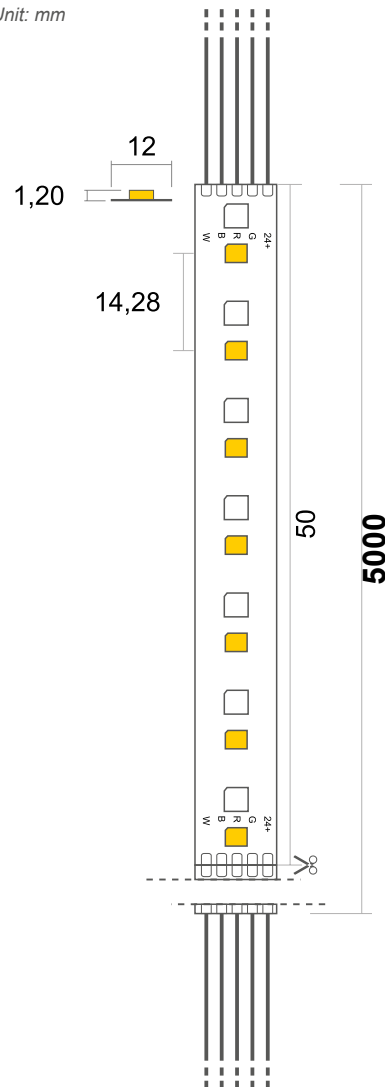

Uscita cavo / Cable output: IN/OUT  
Lunghezza cavi / Cables length: 100mm

Tolleranza di potenza ± 5% - Tolleranza al flusso luminoso ± 5% - Incertezza di misura ± 10% - Ta: 25°C Power tolerance ± 5% - Luminous flux tolerance ± 5% - Measurement uncertainty ± 10% - Ta: 25°C