


3916-01-06 Floot 33W

3000K CRI85

Design: Enrico Davide Bona & Elisa Nobile

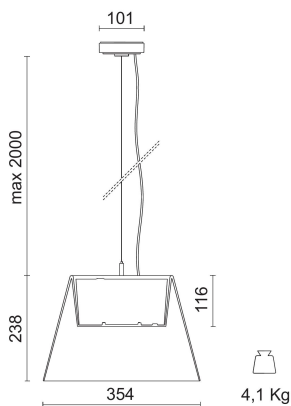

IP 20 IK06

Photometric data



Product Code

3916-01-06

Color

White/Frosted

General specifications

Product type	Suspensions
Mounting type	Pendant
Mounting location	Ceiling
Indoor/Outdoor light	Indoor
Description	Single light lamp provided with a 70° beam. Bell-shaped diffuser in translucent polycarbonate. Ceiling base in die-cast aluminium, polyester painted. Suspension wires in steel, 2 meters long, adjustable with automatic devices. It can be applied on 3-phase LKM tracks, through the proper adapters.
Applications	Shops , Retail , Public and domestic spaces , Hotel halls , Accommodation facilities

Lighting specifications

i Stated L.O.R. and delivered lumens values are related to standard beam angle versions

Lamp description	LED 4800lm 33W 3000K CRI85
Nominal lumens on thermal regime (lm)	4800
LOR	88.7
Delivered lumen (lm)	4258
System wattage (W)	36,1
Watt source (W)	33
Color temperature (K)	3000
CRI	CRI 85
Lamp type	COB LED
Average lamp life (h)	L80B10 50.000
Photobiological risk group	RG1
Diffuser	Frosted polycarbonate

Physical specifications

Body	Gear housing in die-cast aluminium
Finishing	Polyester painted
Optic device	High resistance thermoplastic material
Thermal dissipation	Passive

Electrical specifications

Driver availability	Included
Driver mounting	Integrated
Voltage (V)	220/240
Frequency (Hz)	50/60

Optical specifications

Light distribution	Symmetric
Emission	Direct
Light beam	70°

Weight and dimension

Height (mm)	238
Diameter (mm)	354
Weight (Kg)	4.1

Power tolerance ± 5% - Luminous flux tolerance ± 5% - Measurement uncertainty ± 10% - Ta: 25°C

Accessories



Product Code	28-3140-51
Name	Professional optic device S (Including diffuser)
Light beam	17°
Finishing	Mirror metallized



Product Code	28-3142-51
Name	Professional optic device M
Light beam	30°
Finishing	Mirror metallized



Product Code	28-3138-51
Name	Professional optic device W
Light beam	55°
Finishing	Mirror metallized



Product Code	28-3957-30
Name	Snoot



Product Code	28-3959-30
Name	Honeycomb, to be used with snoot code 28-3957-30



70

Product Code	7558-00-31
Name	Electro/mechanical adapter 6A, load 5kg
Length (mm)	70
Packaging quantity	10



65

Product Code	7618-00-31
Name	Mechanical adapter with automatic locking and steel wire 2000 mm
Length (mm)	65
Packaging quantity	10

Power tolerance $\pm 5\%$ - Luminous flux tolerance $\pm 5\%$ - Measurement uncertainty $\pm 10\%$ - Ta: 25°C